



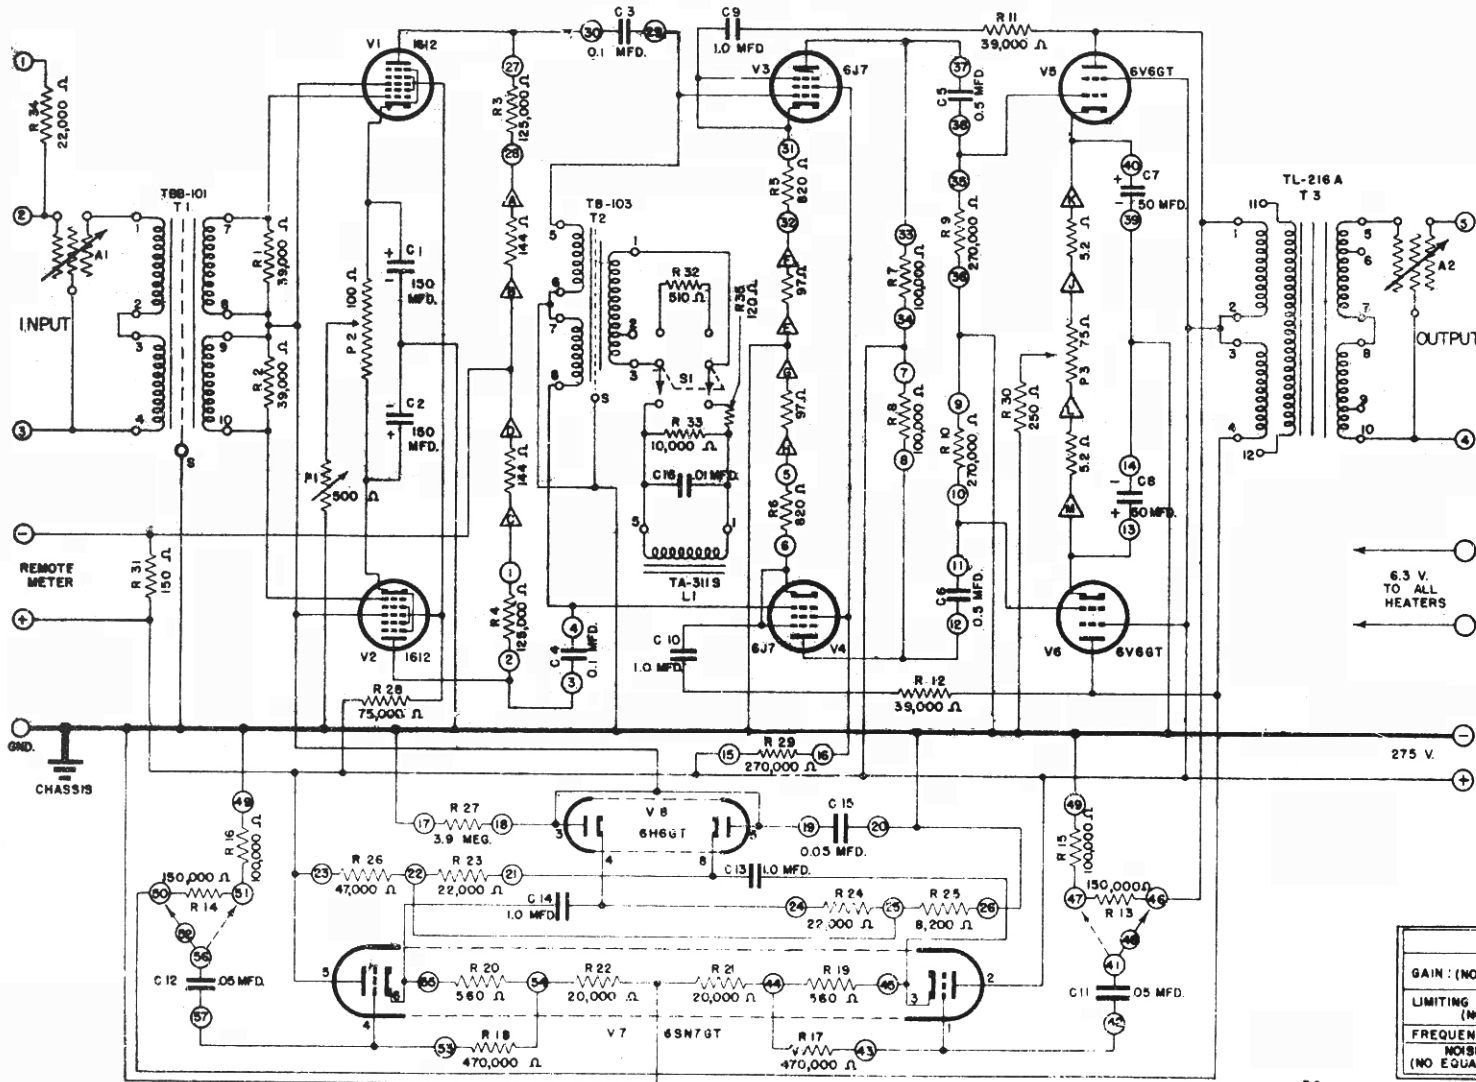

PARTS LIST	
R1, R2	39,000 Ω, 1/2W, ±5% MATCHED 3%
R3, R4	125,000 Ω, 1W, WIRE WOUND, ±1%
R5, R6	820 Ω, 1W, ±5% MATCHED, 3%
R7, R8	100,000 Ω, 1W, ±5% MATCHED, 3%
R9, R10	270,000 Ω, 1W, ±5% MATCHED, 3%
R11, R12	39,000 Ω, 1/2W, ±5% MATCHED, 3%
R13, R14	150,000 Ω, 1/2W, ±5%
R15, R16	100,000 Ω, 1/2W, ±5%
R17, R18	470,000 Ω, 1/2W, ±10%
R19, R20	560 Ω, 1W, ±5%
R21, R22	20,000 Ω, 10W, ±5%
R23, R24	22,000 Ω, 1/2W, ±10%
R25	8,200 Ω, 1W, ±10%
R26	47,000 Ω, 1W, ±10%
R27	3.9 MEG, 1W, ±10%
R28	75,000 Ω, 20W, ±10%
R29	270,000 Ω, 2W, ±10%
R30	250 Ω, 20W, ±10%
R31	150 Ω, 1/2W, WIRE WOUND, ±10%
R32	510 Ω, 1/2W, ±5%
R33	10,000 Ω, 1/2W, ±10%
R34	22,000 Ω, 1/2W, ±10%
C1, C2	150 MFD, 50V D.C.
C3, C4	0.1 MFD, 400V D.C.
C5, C6	0.5 MFD, 400V D.C.
C7, C8	50 MFD, 50V D.C.
C9, C10, C14	1.0 MFD, 500V D.C.
C11, C12, C15	0.05 MFD, 600V D.C.
C16	0.01 MFD, 400 V.D.C.
R35	120 Ω, 1/2W, ±10%
T1	ALTEC LANSING TRANS. TB8-101
T2	ALTEC LANSING TRANS. TB-103 *
T3	ALTEC LANSING TRANS. TL-216 A
L1	ALTEC LANSING TRANS. TA-311S *
A1	DAVEN ATTENUATOR T-334-S
A2	DAVEN ATTENUATOR T-324-S
P1	500 Ω WIRE WOUND IRC W-500
P2	100 Ω WIRE WOUND IRC W-100
P3	75 Ω WIRE WOUND IRC W-75
S1	CENTRALAB NO. 1462
S2	CENTRALAB NO. 1411

OPERATING DATA	
GAIN: (NO EQUALIZATION)	68 DB. 76 DBM.
LIMITING THRESHOLD: (NORMAL)	+72 DB. (0.006W REF. LEVEL) +52 DBM. (0.01W REF. LEVEL)
FREQUENCY RESPONSE: (NO EQUALIZATION)	±1 DB. 20 - 20,000 ~ -45 DB. (0.006W REF. LEVEL) -37 DBM. (0.01W REF. LEVEL)



	TERMINALS	IMPEDANCE
INPUT	1-3	BRIDGING 600 OHMS
OUTPUT	4-5	600 OHMS

ALTEC LANSING
A-322 C AMPLIFIER

